

Rittal – The System.

Faster – better – everywhere.

Standard light – SZ 4138.140

Date : Nov 10, 2020

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Standard light – SZ 4138.140

created: 10.11.2020 build on www.rittal.com/il-en

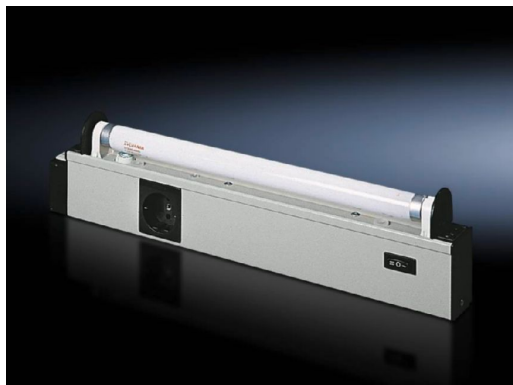

Discontinued article.

Product expires on: 31.03.2017 |||This item is being replaced by: 2500210

Product description

Design: without door operated switch

Supply includes: Standard light
Light
Assembly parts

Product features

Dimensions: Width: 452 mm
Height: 117 mm
Depth: 50 mm

Rated operating voltage: 230 V, 1~, 50 Hz

Installation options: TS horizontal section of the roof frame: direct
TS, SE vertical section: with TS adaptor bracket
SE sections at the front and rear of the roof frame: with TS adaptor bracket
SE extrusions at the side of the roof frame: direct
AE, CM, TP: with universal bracket
AE: with rail for interior installation

Operating temperature: Operation (environment): -15 °C...+45 °C
Bearing: -20 °C...+70 °C

Power consumption: 14 W

Equipment (electrical): Ballast: Magnetic ballast
Light: Fluorescent lamp, base G13

Jack/socket (type): D, earthing-pin (type F, CEE 7/4)
Switch (type): Integral, on/off/door-operated switch mode

Rated insulation voltage:	500 V DC/1s
Rated impulse withstand voltage, phase to earth:	1500 V AC
Rated impulse withstand voltage, phase to phase:	500 V AC
Protection class:	I (PE conductor)
Connection options:	Door-operated switch Power supply via connectors Through-wiring (creating rows of lights)
Light – installation type:	Screw-fastening
Packs of:	1 pc(s).
Weight/pack:	1.48 kg
Copper weight (kg per piece):	0
EAN:	4028177092259
Customs tariff number:	94054095
ETIM 7.0:	EC000321
ETIM 6.0:	EC000321
eCl@ss 8.0/8.1:	27189241
eCl@ss 6.0/6.1:	27189241
Product description:	SZ Standard light, WHD: 452x117x50 mm, 14 W, 230 V, 50 Hz, without door operated switch, with earthing-pin socket
Approvals	
Certificates:	EAC
Declarations:	Declaration of conformity